



FULLY AUTOMATIC TOP & BOTTOM HOT MELT CASE SEALER

K740HM




Designed and engineered for top sealing RSC cases. Case Sealer speeds up to 40 cases per minute



Control Panel





Top & Bottom Flap Folding Rails

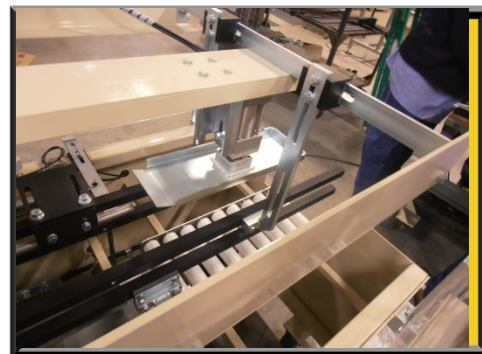

Top & Bottom Compression

FULLY AUTOMATIC TOP & BOTTOM HOT MELT CASE SEALER

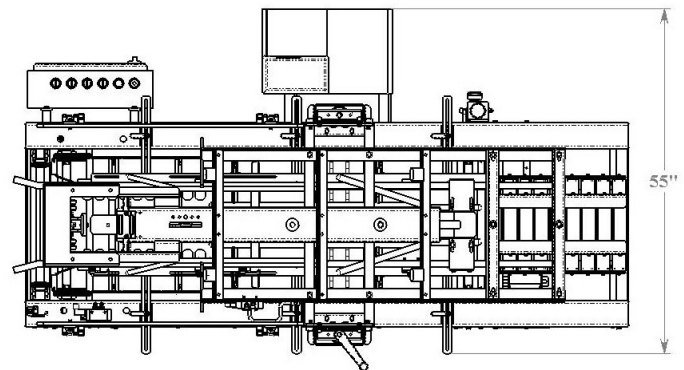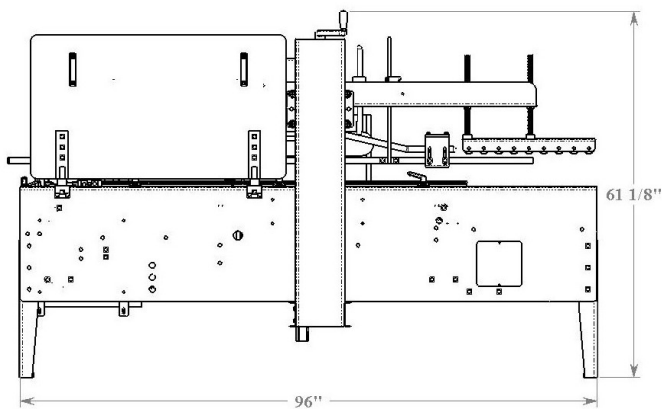

STANDARD FEATURES		OPTIONAL
Machine Performance	Up to 40 CPM.	CPM outside of Standard Range
Machine Safety:	1/2" Lexan Shields & Fully Guarded Pinch Points	Stainless Steel Wire Mesh
Power req:	240VAC / 3 Phase / 60 Hz.	480VAC / 3 Phase/ 60Hz
Drive Shafts:	Stainless Steel, Precision Ground Shafts.	
Adjustability:	Crank screws adjust height and width.	
Case Advance:	Motorized bottom belts	Chain Driven Flight Bars
Compression Type:	Side Belts with Spring Loaded Rollers.	
Corrosion Protection:	Powder coating and zinc plating on all surfaces.	Stainless Steel Construction
Standard Case Range	Min: 8"L x 6-1/2"W x 5"H Max: : 24"L x 18"W x 24"H	Case Sizes outside of Standard Range